



HEIDENHAIN




NC solutions

Description of NC program 3235

English (en)
9/2017

1 Description of the NC program 3235_en.h

NC Program for machining a convex radius on the workpiece edge

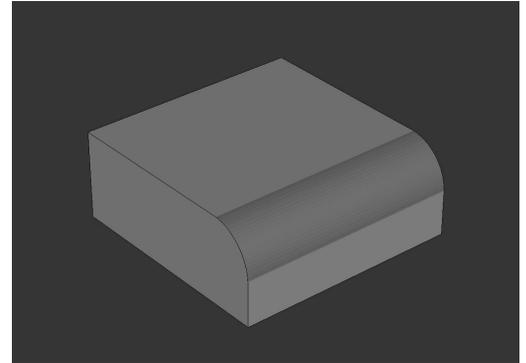

Description

With this program, the control mills a convex radius along the X axis. This radius is milled by the control in contour lines. You define the number of contour lines and can thereby influence the surface quality and the machining time. Machining can be performed using either an end mill or a ball-nose cutter.



Please note while programming.

- The preset must be located in the X axis and in the Y axis at the minimum point of the workpiece because machining is performed in the positive direction.
- The preset in the Z axis must be located on the lower edge of the radius.

At program start, you define the tool and all of the parameters required for machining. The control then performs multiple calculations. If you have defined the tool in the parameters as an end mill, then a jump is made to a subprogram in which further calculations are carried out.

After these calculations, the control shifts the datum to the center of the radius to be machined. The control then pre-positions the tool in the X axis and in the Y axis. The control calculates this position in the X axis, taking the tool radius into account as well as the lateral safety clearance you have defined.


After this, the control positions the tool in the Z axis at the height of the first contour line. It then mills the first path. The end point is positioned in a such a way that the tool moves beyond the workpiece length by the amount of the tool radius and the lateral safety clearance.

The control then calculates the starting point of the next contour line and approaches this point. Subsequently, the control moves along the X axis to the next milling path. Calculations and positioning are programmed in a program section repeat that the control repeats until it has milled the number of contour lines you have defined. At the end of the program, the control resets the datum shift. It then retracts the tool and ends the NC program.

Parameter	Name	Meaning
Q30	CIRCLE CENTER IN Y	Y coordinate of the center of the radius to be machined.
Q31	CIRCLE CENTER IN Z	Z coordinate of the center of the radius to be machined.
Q32	RADIUS	The radius to be machined
Q34	PITCH	The number of contour lines that the control mills in order to machine the radius
Q35	OVERSIZE	Allowance that remains on the workpiece after the machining operation.
Q36	MACHINING HEIGHT	Z coordinate at the radius end point
Q37	LENGTH OF WORKPIECE	Workpiece length in the X axis
Q38	LATERAL SET-UP CLEARANCE	Distance between the tool and the workpiece approached by the control during positioning in the Y and Z axis.
Q39	FEED RATE FOR MILLING	Traversing speed of the tool during milling
Q40	SHAPE OF THE TOOL	Definition of the tool type ¹⁾ <ul style="list-style-type: none"> ■ Q40 = 0 for machining with an end mill ■ Q40 = 1 for machining with a ball-nose cutter
Q41	RADIUS OF BALL-NOSE-CUTTER	Sphere radius of the tool being used ²⁾

1) This definition must match the tool defined in the **TOOL CALL!**

2) For definition of an end mill without function

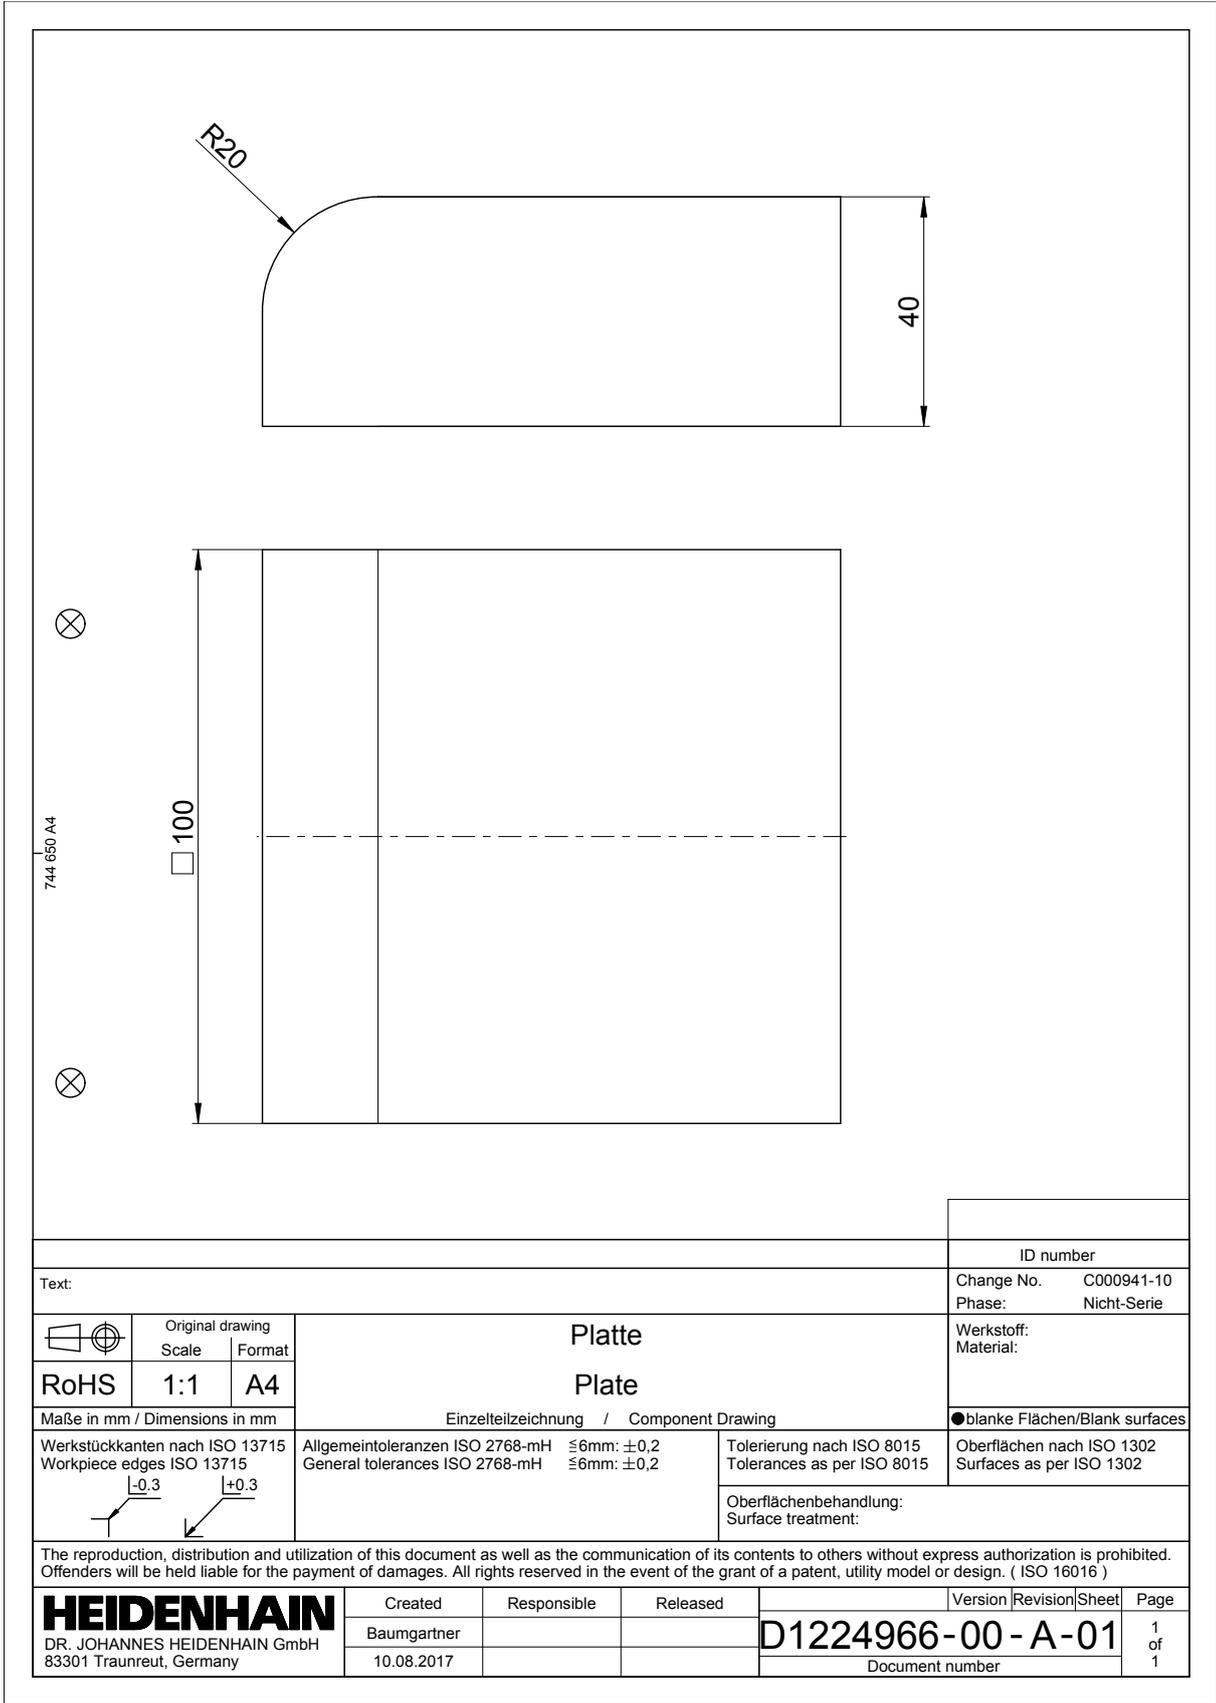

ID number	
Change No.	C000941-10
Phase:	Nicht-Serie
Werkstoff: Material:	
●blanke Flächen/Blank surfaces	
Text:	


	Original drawing	Format
RoHS	Scale	Format
	1:1	A4
Maße in mm / Dimensions in mm		
Werkstückkanten nach ISO 13715 Workpiece edges ISO 13715	Allgemeintoleranzen ISO 2768-mH $\leq 6\text{mm}$: $\pm 0,2$ General tolerances ISO 2768-mH $\leq 6\text{mm}$: $\pm 0,2$	
	Tolerierung nach ISO 8015 Tolerances as per ISO 8015	
	Oberflächenbehandlung: Surface treatment:	

Platte Plate		
Einzelteilzeichnung / Component Drawing		
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)		

HEIDENHAIN
DR. JOHANNES HEIDENHAIN GmbH
83301 Traunreut, Germany

Created	Responsible	Released
Baumgartner		
10.08.2017		

Version	Revision	Sheet	Page
D1224966-00 - A-01			1 of 1
Document number			

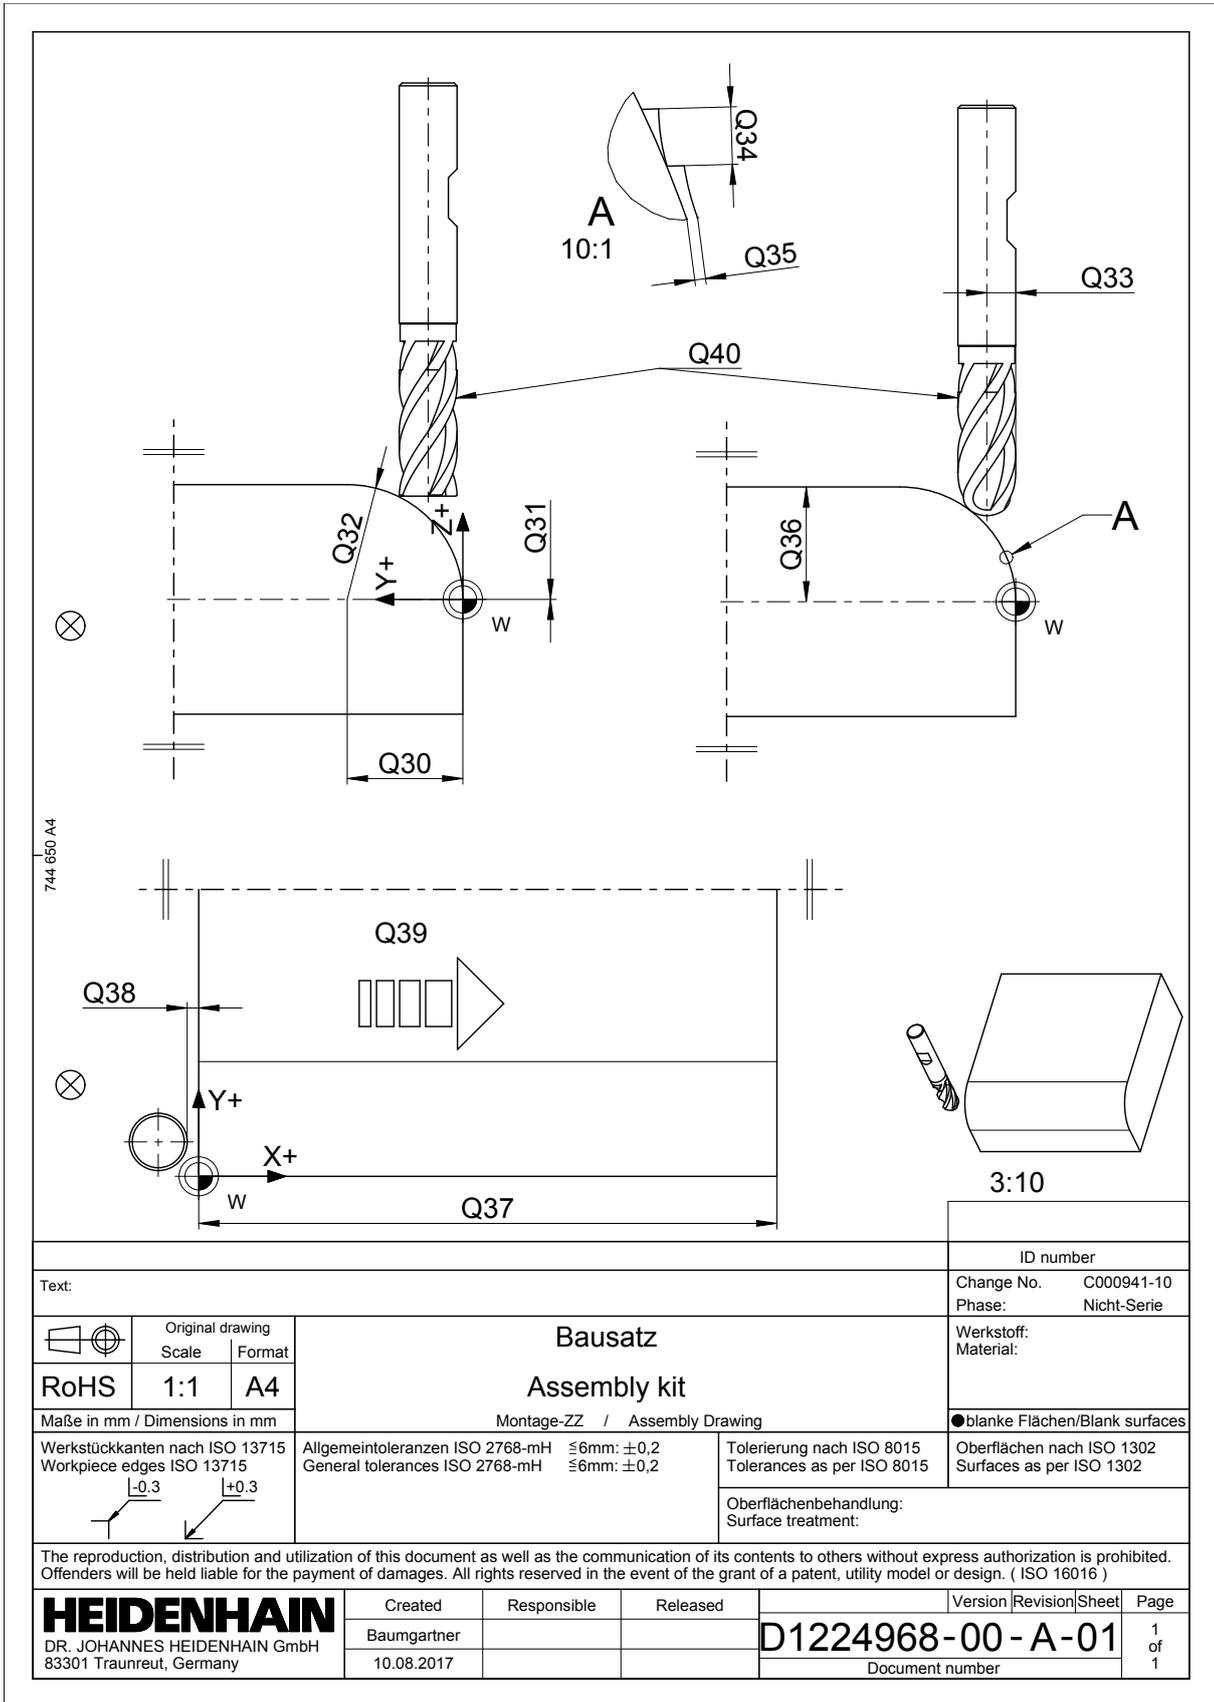

Text:		ID number	
Change No. C000941-10		Phase: Nicht-Serie	
Werkstoff: Material:		●blanke Flächen/Blank surfaces	
	Original drawing Scale: 1:1 Format: A4	Bausatz Assembly kit	
Maße in mm / Dimensions in mm		Montage-ZZ / Assembly Drawing	
Werkstückkanten nach ISO 13715 Workpiece edges ISO 13715 	Allgmeintoleranzen ISO 2768-mH ≤6mm: ±0,2 General tolerances ISO 2768-mH ≤6mm: ±0,2	Tolerierung nach ISO 8015 Tolerances as per ISO 8015 Oberflächenbehandlung: Surface treatment:	Oberflächen nach ISO 1302 Surfaces as per ISO 1302
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)			
HEIDENHAIN DR. JOHANNES HEIDENHAIN GmbH 83301 Traunreut, Germany	Created	Responsible	Released
	Baumgartner		
10.08.2017	D1224968-00-A-01		Version Revision Sheet Page
Document number			1 of 1